



NSR's new products of Fiber Optic Gyrocompass:

- 4 models with heading accuracy up to $0.1^{\circ} \times \sec \phi$.
- Short settling time and flexible operating modes.
- Advanced optical technology and signal processing algorithms adopted.
- Highly accurate HDG.
- Large 7-inch color LCD.
- Touch screen operation.
- Data interface to BAM/INS.
- Multi-outputs of RS422.
- Maintenance-free design.
- Compliant with the standards of IMO A.424 (XI), IMO A.821 (19), IMO A.694 (17), ISO 8728:2024 and ISO 16328:2014, etc.



EQUIPMENT LIST

● STANDARD

NGC-5010		NGC-5030		NGC-5050		NGC-5070	
Compass Unit ($\leq 0.1^\circ$)	NGC-501	Compass Unit ($\leq 0.3^\circ$)	NGC-503	Compass Unit ($\leq 0.5^\circ$)	NGC-505	Compass Unit ($\leq 0.7^\circ$)	NGC-507
Interface Unit	NGC-512	Interface Unit	NGC-512	Interface Unit	NGC-512	Interface Unit	NGC-512


● OPTIONS

Display Unit	NGC-513	Remote Unit	NGC-514	ROT Indicator	NGC-516	Steering Repeater Compass	NGC-518
Bearing Repeater Compass	NGC-519	Azimuth Reading Device	NGC-519A	Thermal Printer	NPT-100	Wall Mounting Bracket	NGC-519B
Floor-Standing Mounting Bracket	NGC-519S			Flush Mount Bracket for NGC-513	NFB700A		

SPECIFICATIONS

Settling Time	10 min
Heading Accuracy	NGC-5010: $\leq 0.1^\circ$ sec ϕ
	NGC-5030: $\leq 0.3^\circ$ sec ϕ
	NGC-5050: $\leq 0.5^\circ$ sec ϕ
	NGC-5070: $\leq 0.7^\circ$ sec ϕ
Power Supply	AC 220V, DC 24V
Power Consumption	$\leq 55W$
Display	7-inch, color LCD, touch screen operation, Android O/S 154 (W) $\times$ 87 (H) mm, 1024 $\times$ 600 dots resolution
Interface	External Compass, Repeater, Heading Out, Sensor Input, Alarm System, BAM/INS, Printer, RJ45
Ambient Temperature	-20°C $\sim$ +55°C operational
IP Grade	IPX6 (for NGC-519), IP22 (for other items)

SIZE DIMENSION

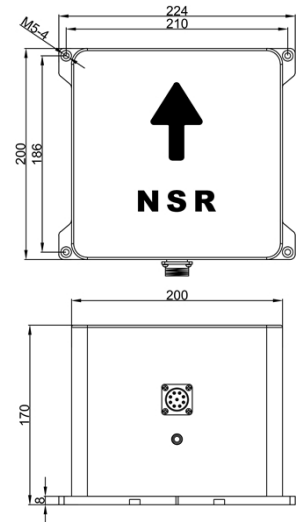

COMPASS UNIT

SYSTEM DIAGRAM

NGC-5010/5030/5050/5070

MARINE FIBER OPTIC GYROCOMPASS

