

- Displayed with 7-inch color LCD
- ON/OFF history record
- Alarm tone selectable
- Routine test available
- Password set by menu
- Data interface to BAM/INS
- Type approval with DNV (MED) and CCS



- Conforms to the latest rules, including IMO MSC.128 (75), MSC.302 (87), IEC 62616.
- 7-inch Color LCD used in the Control Unit.
- Automatically record ON/OFF history.
- Pre-stored tones are selectable for alarm.
- A password is used to set operation mode and dormant time.
- 2nd alarm units can be selected separately.
- Test function and emergency call available.




SPECIFICATIONS


- Mode: MANUAL ON, MANUAL OFF
- Alarm: Visual, 1st Stage Audio, 2nd Stage Audio, 3rd Stage Audio
- Dormant: 3~12 mins (selectable)
- Accuracy: $\pm 5s$
- Sound: 75 ~85 dB (A)
- Power Input: DC 24V, AC 100V~240V
- Input Port: RS422 $\times$ 1 port, Reset ON/OFF $\times$ 9 CH
- Output Port: RS422 $\times$ 1 port, Alarm $\times$ 10 CH, Failure Output $\times$ 1 CH
- Temperature: -20 $^{\circ}$ C ~+55 $^{\circ}$ C (operating)
- IP Grade: IP22 (indoor parts), IP56 (outdoor parts)

WATCH ALARM CHART

Alarm sequence without acknowledgements

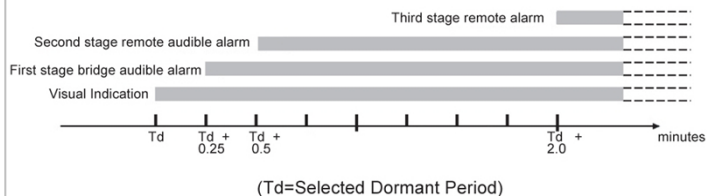

SIZE DIMENSION

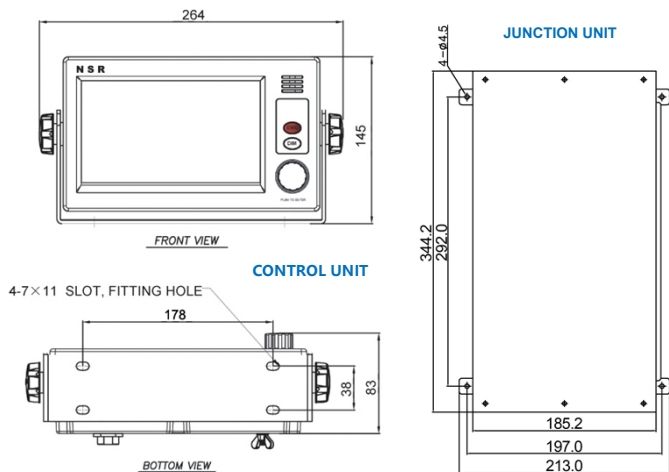

EQUIPMENT LIST

● STANDARD

- Control Unit	NBW-1000	1 unit
- Junction Unit	NBW-1050J	1 unit
- Reset Unit	NBW-1090RW	1- 4 unit
- Alarm Unit	NBW-1010A	1-10 unit
- Accessories		1 set

● OPTIONS

- Motion Detector	NBW-1090P	
- NMEA Selector Switch	NGS-100	1 pc

JUNCTION UNIT



RESET UNIT



(outdoor type)



(indoor type)

ALARM UNIT



MOTION DETECTOR

